


D-Power

Ultra High-Power Fiber Laser Cutting Machine


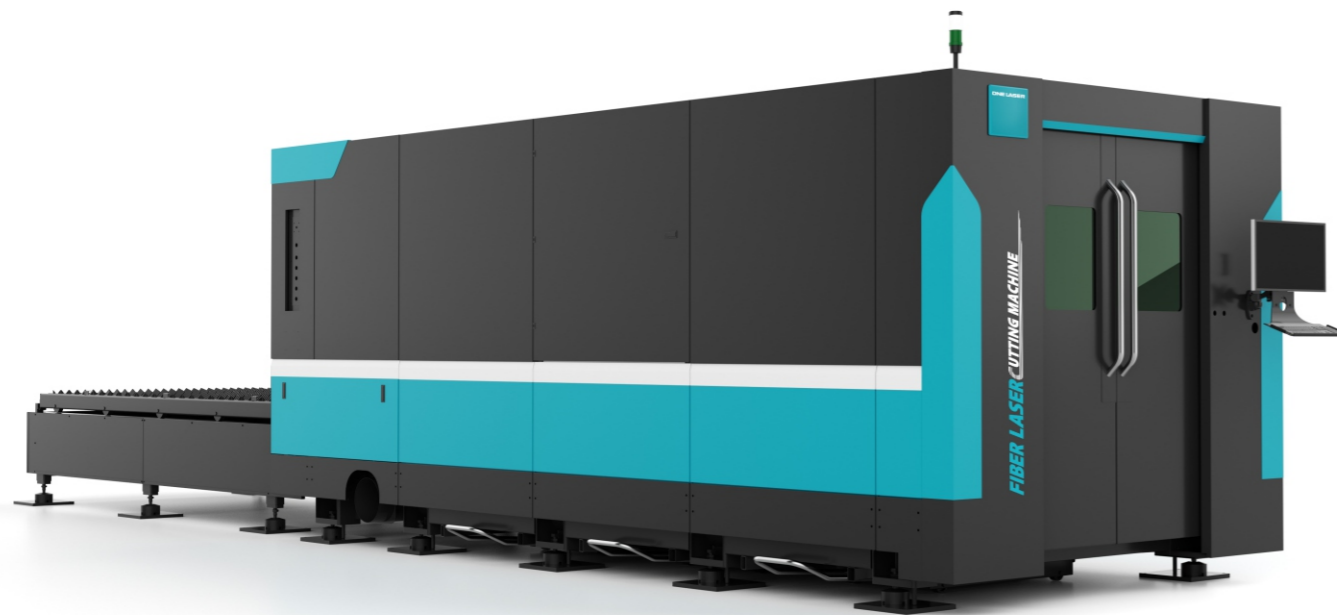


- 1 Self-developed, patented optical cutting head.
- 2 European workmanship standard machine table.
- 3 High-precision temperature and humidity control system.

Sales hotline:
+86 400 888 7008
<https://www.dne.global>



opposite

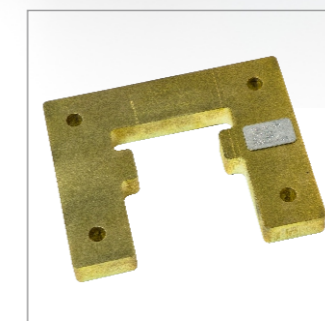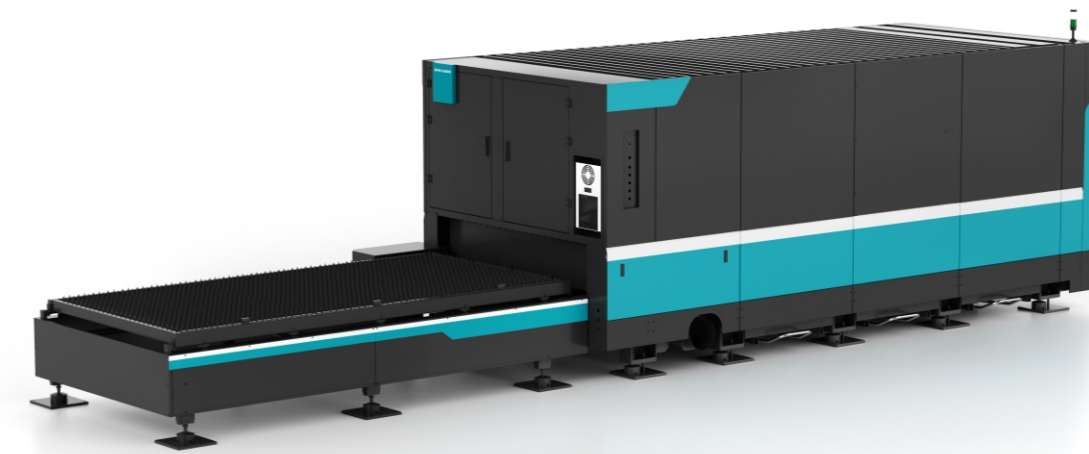

D-Power

Ultra-High Power Fiber Laser Cutting Machine

Technical Parameters	
Product	D-Power
Laser source	Fibe Laser Source(optional)
Format	1530 2040 2560
Laser power	3000W 6000W 12000W
X/Y-axis linkage maximum acceleration	1.5G
X/Y-axis linkage maximum positioning speed	150 m/min
X/Y-axis positioning accuracy	±0.05mm
X/Y-axis repositioning accuracy	±0.03mm
Power consumption of complete machine	≤30kW ≤40kW ≤65kW
Bevel cutting function	"Beveling Function: Available only on D-Power2560 ; processing restricted to upper worktable."

Note: The picture is for reference only, please refer to the actual product.

front