



bending
machines

EUROMAC®

general catalogue 2.0

Every **steel** and **copper** workshop can take advantage of a **Digibend**

Are you using or thinking to use a conventional press brake to **bend small parts, thick material or bus bars**? Then you need to look at a **Digibend a powerful and versatile horizontal bending machine**.

Bending horizontally on a flat bed has two main advantages:

- your part will always be perfect since you lay on a flat surface instead of referencing against two small fingers.
- you can bend a close loop (like a 9 shaped part), hence saving time and possibly also a welding operation.

The Digibend takes advantage of this and with its unique features goes beyond.



Digibend

Digibend: a powerful and versatile machine that can meet your processing needs

The Digibend table is a machined out of a single monoblock of **Meehanite® 700N/mm²**, no welding points

The **cylinder** is completely embraced in the structure and the RAM is guided in all its stroke in order to be able to **maintain the highest accuracy even in the high tonnage demanding applications.**

The **strong structure** combined with the unique control system and the specifically designed hydraulics ensure the **repeatability accuracy (0,02 mm) even after thousands of bends.**

The **flexible and strong design** of the Digibend table (with antimarking treatment) together with the **easy to use control system** (2 axis CNC controlled) allows any customer to **create their own custom tools for special applications.**



TOOLS

With Euromac you get the maximum **bending flexibility**

Euromac offers a variety of standard tools for a Digibend and changing from one tool setup to another is **fast and easy**. The Digibend allows any customer to create their own **custom tools** for special applications.



Bending tool with pin \varnothing 30 mm, H=200 mm and antiflection bar. Max 200 x 5 mm.




4 jaw bending tool for round, square, rect. bars and thick pipes up to 180°. Max 100 x 20 mm or \varnothing 50 mm.



Bending tool 30° with U shaped die for bending flat bars up to 30°. Max. 16 x 200 mm.




Bending tool with pin \varnothing 50 mm, H=200 mm, revolving pin single V die and antiflection bar. max. 200 x 8 mm. *Patent Pending.*

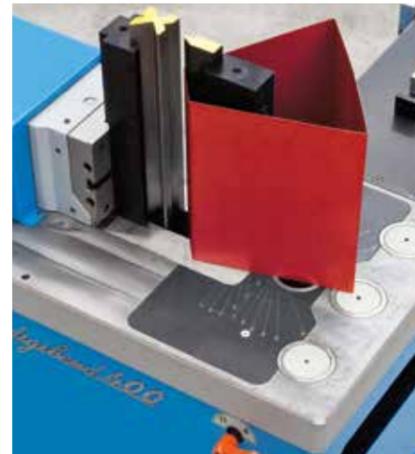

Punch and die H=400 mm for bending plate sheets. Max. 400 x 4 mm.



Shearing unit for flat bars. Max 150 x 12 mm.

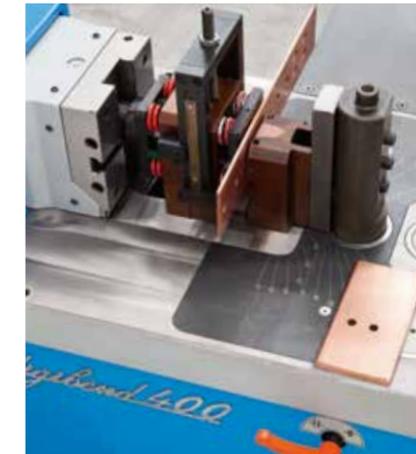

Punching unit for holes up to \varnothing 30 mm. Max thickness 12 mm.



2 jaw bending tool for thick wall pipes from 3/8" gas (17.2 mm) up to 2" gas (60.3 mm) and round bars, up to 90°.



Tool single V die with revolving pin (mark-free bending) for thick plates. Max 200 x 40 mm.



Movable bending punch and fixed die for tight bends.



Pin bending punch \varnothing 80 mm with antiflection bar for bending a closed loop into thick wall bars. Max 200 x 15 mm.



Straightening tool for pipes, steel beams, flat bars etc. for precision and heavy straightening jobs.



2 jaw bending tool with set of flanges for flat and shaped bars up to 90°. Max 60 x 20 mm.



Rotary bending tool for pipes, round and box tube, up to 180°. max \varnothing 50 mm.

SOFTWARE


Digi Soft®

The easiest way to program and develop your production processes

New Digisoft software allows you to programme and develop production processes automatically.

You can therefore display and control different types of job hence combining **technology and innovation** to the **most accurate and reliable machine of the sector.**

- Simple and intuitive
- Automatic calculation of bending angles and sequences
- Automatic calculation of workpiece development
- Different programmes that control: bending, punching, shearing and straightening
- Tool and finished piece DXF importing function

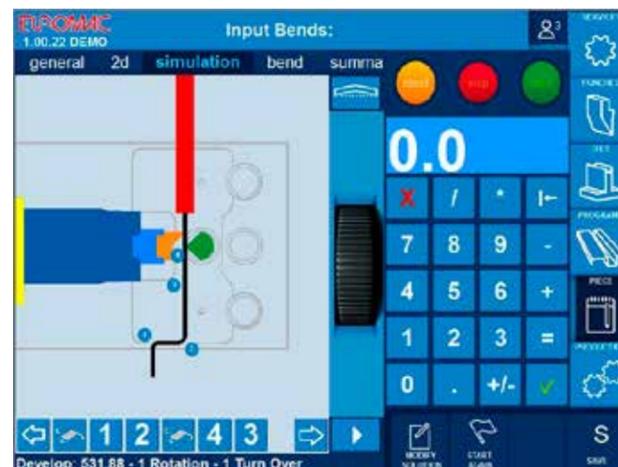

New Touch Graphic Control with Integrated Wifi

Includes the Digisoft Software

Allows programming options of:

- Bending
- Punching
- Shearing
- Straightening

Graphics Programs in 2D

DXF Files Import

Optimized calculation of bending sequence

Possibility to program from the office



Compatible with



digibend 200e



digibend 200 CNC



digibend 400 CNC



digibend 800 CNC



technical data

200e

| | |
|--|----------------------|
| Max. pressure (kN) | 200 |
| Max. stroke (mm) | 195 |
| Max. working speed (mm/sec) | 9.6 |
| Min. working speed (mm/sec) | 4.8 |
| Return speed (mm/sec) | 48 |
| Average working speed (mm/sec) | 28.8 |
| Storable programs | 255 |
| Sequence of storable programs | 50 |
| Number of bends for each sequence | 16 |
| Working table dimensions (mm) | 480 x 1060 x 925 (H) |
| Fixing holes in working table (nr. x Ø - mm) | 1 x Ø 80 / 2 x Ø 50 |
| Digisoft optional | No |
| Working height (mm) | 925 |
| Oil tank capacity (lt.) | 40 |
| Motor HP - Kw | 3 - 2 |
| High bending (mm) | H=200 |
| Extra high bending (mm) | 400 |
| Shearing max thickness | H=150 x 6 (th) |
| Straightening (H/thickness) | H=200 |
| Two-jaw-bending (mm) | Ø 33.7 |
| Rotary bending (mm) | Ø 50 |
| CNC automatic backgauge (Length, mm) | NO |
| Approx. weight (kg) | 340 |
| Overall dimensions (L x l x h) | 580 x 1060 x 1150 |

technical data

200 CNC

| | |
|--|-----------------------|
| Max. pressure (kN) | 200 |
| Max. stroke (mm) | 195 |
| Max. working speed (mm/sec) | 9.6 |
| Min. working speed (mm/sec) | 4.8 |
| Return speed (mm/sec) | 48 |
| Average working speed (mm/sec) | 28.8 |
| Storable programs | 255 |
| Sequence of storable programs | 50 + 5 (for punching) |
| Number of bends for each sequence | 16 |
| Working table dimensions (mm) | 480 x 1060 x 925 (H) |
| Fixing holes in working table (nr. x Ø - mm) | 1 x Ø 80 / 2 x Ø 50 |
| Digisoft optional | Yes |
| Working height (mm) | 925 |
| Oil tank capacity (lt.) | 40 |
| Motor HP - Kw | 5.5 - 4 |
| High bending (mm) | H=200 |
| Extra high bending (mm) | 400 |
| Shearing max thickness | H=150 x 6 (th) |
| Straightening (H/thickness) | H=200 |
| Two-jaw-bending (mm) | Ø 33.7 |
| Rotary bending (mm) | Ø 50 |
| CNC automatic backgauge (Length, mm) | 1250 / 2000 / 3000 |
| Approx. weight (kg) | 340 |
| Overall dimensions (L x l x h) | 580 x 1060 x 1150 |

technical data

400 CNC

| | |
|--|-----------------------|
| Max. pressure (kN) | 400 |
| Max. stroke (mm) | 245 |
| Max. working speed (mm/sec) | 9.6 |
| Min. working speed (mm/sec) | 4.8 |
| Return speed (mm/sec) | 62 |
| Average working speed (mm/sec) | 35.8 |
| Storable programs | 255 |
| Sequence of storable programs | 50 + 5 (for punching) |
| Number of bends for each sequence | 16 |
| Working table dimensions (mm) | 580 x 1230 x 925 (H) |
| Fixing holes in working table (nr. x Ø - mm) | 4 x Ø 80 |
| Digisoft optional | Yes |
| Working height (mm) | 925 |
| Oil tank capacity (lt.) | 40 |
| Motor HP - Kw | 5.5 - 4 |
| High bending (mm) | H=200 |
| Extra high bending (mm) | H=400 |
| Shearing max thickness | H=150 x 10 (th) |
| Punching max thickness | Ø 30 x 10 (th) |
| Straightening (H/thickness) | H=200 |
| Two-jaw-bending (mm) | Ø 60 |
| Rotary bending (mm) | Ø 50 |
| CNC automatic backgauge (Length, mm) | 1250 / 2000 / 3000 |
| Approx. weight (kg) | 700 |
| Overall dimensions (L x l x h) | 580 x 1230 x 1150 |

technical data

800 CNC

| | |
|--|-----------------------|
| Max. pressure (kN) | 800 |
| Max. stroke (mm) | 345 |
| Max. working speed (mm/sec) | 9.3 |
| Min. working speed (mm/sec) | 4.6 |
| Return speed (mm/sec) | 45 |
| Average working speed (mm/sec) | 27.2 |
| Storable programs | 255 |
| Sequence of storable programs | 50 + 5 (for punching) |
| Number of bends for each sequence | 16 |
| Working table dimensions (mm) | 650 x 1565 x 925 (H) |
| Fixing holes in working table (nr. x Ø - mm) | 6 x Ø 80 |
| Digisoft optional | Yes |
| Working height (mm) | 925 |
| Oil tank capacity (lt.) | 60 |
| Motor HP - Kw | 5.5 - 4 |
| High bending (mm) | H=200 |
| Extra high bending (mm) | H=400 |
| Shearing max thickness | H=150 x 12 (th) |
| Punching max thickness | Ø 30 x 12 (th) |
| Straightening (H/thickness) | H=200 |
| Two-jaw-bending (mm) | Ø 60 |
| Rotary bending (mm) | Ø 50 |
| CNC automatic backgauge (Length, mm) | 1250 / 2000 / 3000 |
| Approx. weight (kg) | 1500 |
| Overall dimensions (L x l x h) | 750 x 1565 x 1200 |


1 inch= 25.4 mm

All application range indications are referred to steel material with 400N/mm² resistance.

Euromac meets your ambitions



sorting cell

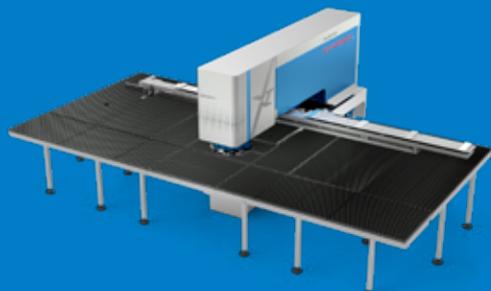

punching machines



automated electric press brake



electric press brake



notching machines



complete and automated
sheet metal working line



INDUSTRY 4.0

EUROMAC®

Euromac S.p.A.
Via per Sassuolo, 68/g
41043 Formigine (MO) - Italy

Tel. +39 059 579511
Fax +39 059 579512
info@euromac.it



PRODUCED & ASSEMBLED
IN ITALY BY EUROMAC

www.euromac.com

Disclaimer. Actual product may differ slightly from
images shown in this catalogue.
All information and data on this catalogue is
subject to change without notice.