


CY

3-ROLL INITIAL PINCH PLATE ROLLS

CY Series (M)

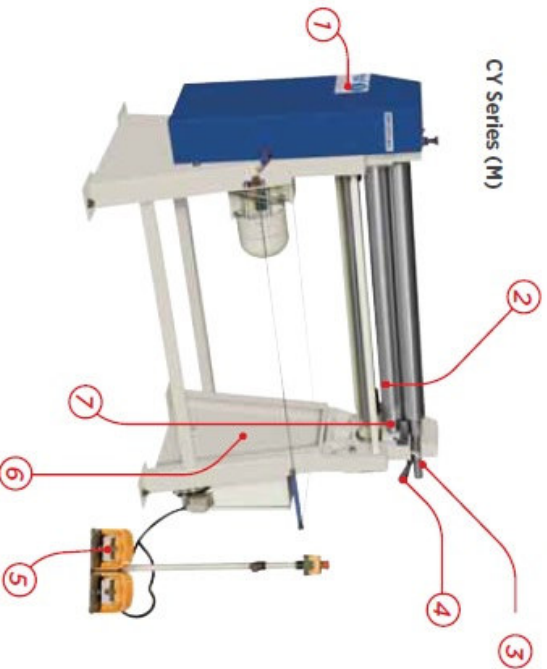

CY Series (MMIUG)



CY Series



- ① CE Compliance
- ② Up and down movements of the back and bottom rolls by hand wheel
- ③ Manual rolling by hand wheel
- ④ Swivel out top roll
- ⑤ Cast iron body
- ⑥ Separate control foot pedal (if the electric drive is selected)
- ⑦ Cone bending device

OPTIONAL ACCESSORIES

- Hardened rolls
- Digital readout for displaying positions of the back roll
- Motorized rolling
- Motorized up and down movement of the back roll
- Body panel (cover)



CY/C/CZ TECHNICAL INFORMATION

MODEL	Working Length	Pre-Bending	Max.Thickness	Top Roll ø	Min. Bending ø	Motor Power	Length	Height	Width	Weight
CY 70-10/1,8	1050	1,5	1,8	70	105	1,1	1650	1160	700	350
CY 70-15/1,2	1550	1,0	1,2	70	105	1,1	2150	1160	700	370
CY 75-12/2,0	1250	1,5	2,0	75	117	1,1	1850	1160	700	380
CY 90-10/3,3	1050	3,0	3,3	90	130	1,1	1650	1200	700	475
CY 90-12/3,0	1256	2,5	3,0	90	130	1,1	1850	1200	700	500
CY 90-15/2,5	1550	2,2	2,5	90	130	1,1	2150	1200	700	550
CY 95-20/1,8	2050	1,5	1,8	95	135	1,1	2650	1200	700	660

- Data indicated above are based on steel with yield point:240 N/mm²
- For cone bending, all bending values must be reduced %50.
- All specifications are subject to change without notice.